


VOLTAGE PROTECTION RELAY

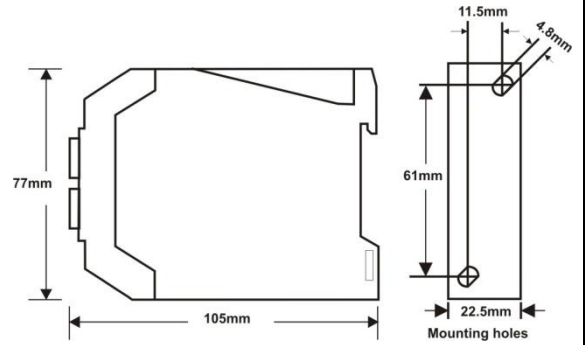

Dimensions

All dimensions in mm

FEATURES	<ul style="list-style-type: none"> 3Ø / 3 wire input Monitors phase sequence, phase failure, under voltage, over voltage Settable trip delay through DIP switch Led indication : Relay , Fault High reliability Compact Din rail / base mounting 		LED INDICATION CHART				
			CONDITION	RELAY	FAULT LED		
			Nominal	ON	OFF		
			Phase Reversed	OFF	ON		
				L-L Over/Under Voltage	OFF	Blinking at 5Hz	
				Phase Missing	OFF	Blinking at 2Hz	
FUNCTIONAL SPECIFICATIONS	PHASE SEQUENCE MONITORING	Yes		SWITCH SETTINGS			
	PHASE FAILURE MONITORING	Yes		<div style="display: flex; align-items: center;"> <div style="margin-right: 10px;">ON ↓</div> <div style="display: flex; flex-direction: column; gap: 5px;"> <div style="display: flex; align-items: center;"> <div style="border: 1px solid black; width: 15px; height: 15px; margin-right: 5px;"></div> <div style="border: 1px solid black; width: 15px; height: 15px; margin-right: 5px;"></div> <div style="border: 1px solid black; width: 15px; height: 15px; margin-right: 5px;"></div> <div style="border: 1px solid black; width: 15px; height: 15px;"></div> </div> <div style="margin-left: 5px; font-size: 8px;">1 2 3 4</div> </div> <div style="margin-left: 10px;">0.2 Sec</div> </div> <div style="display: flex; align-items: center;"> <div style="border: 1px solid black; width: 15px; height: 15px; margin-right: 5px;"></div> <div style="border: 1px solid black; width: 15px; height: 15px; margin-right: 5px;"></div> <div style="border: 1px solid black; width: 15px; height: 15px; margin-right: 5px;"></div> <div style="border: 1px solid black; width: 15px; height: 15px;"></div> </div> <div style="margin-left: 5px; font-size: 8px;">1 2 3 4</div>			

0.4 Sec

1 2 3 4

0.6 Sec

1 2 3 4

0.8 Sec

1 2 3 4

1.0 Sec

1 2 3 4

2.0 Sec

1 2 3 4

4.0 Sec

1 2 3 4

6.0 Sec

1 2 3 4

8.0 Sec

1 2 3 4

10.0 Sec

TIMING DIAGRAM

