




# HOOTER – 144x144mm



Dimensions

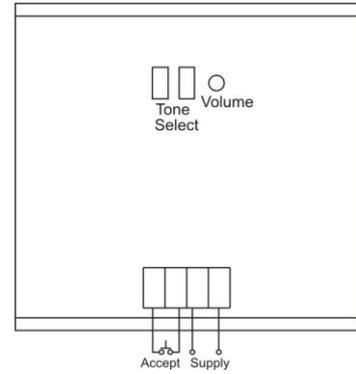

**Terminal Connection**

**144x144 mm**

ORDER CODE	H14F-U
SUPPLY VOLTAGE	20 to 240V AC , 50 / 60Hz or 12 to 240V DC
INRUSH CURRENT	5A @240AC , 500mA at 12V DC
POWER CONSUMPTION	6VA / Watt Max.
FLASHER	0.5Hz flashing till supply removal
ACCEPT(RESET) FACILITY	Push button on front & Terminals on back *
RESET TIME	Less than 1 Sec
TONES	4 Tone with LED Flasher
tone SELECT SWITCH	Present on rear
VOLUME CONTROL	Present on rear
AUDIO LEVEL	110db ±10%
OPERATING AMBIENT	0~55°C
STORAGE AMBIENT	-20°C to 85°C
HUMIDITY	95% RH non condensing
MOUNTING	Flush at front (Panel Mounting)
DIMENSIONS	Overall : 144 X 144 X 80 mm Cutout : 138 X 138mm +1.0, -0.0
TERMINALS	Suitable for 2.5 mm <sup>2</sup> wire

\* Note: Terminals on back to be used with potential free contacts for hooter mute/reset. Once it's reset, make aux supply on & off to restart hooter.