



BLACK SERIES SMPS 60W SINGLE OUTPUT

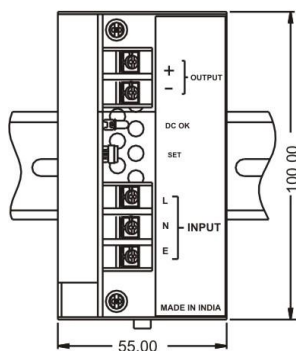

DIN Rail Mounting

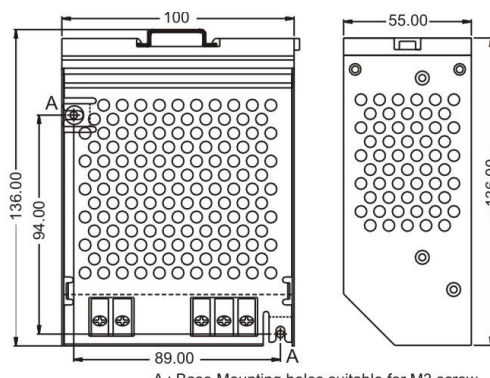

Base Mounting

All dimensions in mm

FEATURES	<ul style="list-style-type: none"> • Single Phase Input • Built In Transient protector & EMI filter • Protection against short circuit, overload & overvoltage • Low ripple & noise • Cooling by free air convection • Power Ok Indication, Terminations, Output Set control & Rating details on Front • 100% Full Load Burn in Tested • Low Cost • High Reliability • Compact 					
ISOLATION	Input – Output : 1.5KVAC, 1 minute Input – Earth : 1.5KVAC, 1 minute Output – Earth : 0.5KVAC, 1 minute					
EFFICIENCY	70 ~ 75%					
O/P VOLTAGE ADJUSTMENT	+/- 10% of Nominal Output Voltage					
LINE & LOAD REGULATION	Better than 0.5%					
OVERLOAD PROTECTION	Yes					
HOLD UP TIME	> 20ms at Rated Input Voltage and Load					
OPERATING AMBIENT	0 ~ 50°C, 95% RH					
STORAGE AMBIENT	-20°C to 85°C					
TERMINATIONS	45 Deg. Screw type, for 2.5mm sq. wire					
MOUNTING	35 mm DIN rail & Screw Mounting					
WEIGHT	480 grams					
ORDERING INFORMATION	NOMINAL INPUT : 230VAC/DC		OUTPUT	RIPPLE & NOISE	OVERVOLTAGE PROTECTION	
	INPUT VOLTAGE	AC				DC
	INPUT RANGE	185 ~ 270V				200 ~ 360V
	I/P FREQUENCY	47 ~ 63Hz				—
	I/P CURRENT (max)	1.0A @230V				0..35A @230V
	INRUSH CURRENT	32A @230V	23A @230V			
	ORDER CODE	BL1250		12V : 5A	< 120mV	< 16V
ORDER CODE	BL2425		24V : 2.5A	< 240mV	< 30V	

Note :

1. All parameters measured at nominal input, rated load and 25°C of ambient temperature unless otherwise specified.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 100uf parallel capacitor.
3. The power supply is intended to be installed as a component inside the enclosure of final equipment. The final equipment must be re-confirmed that it still meets the EMC directives.