



POWER DISTRIBUTION MODULES

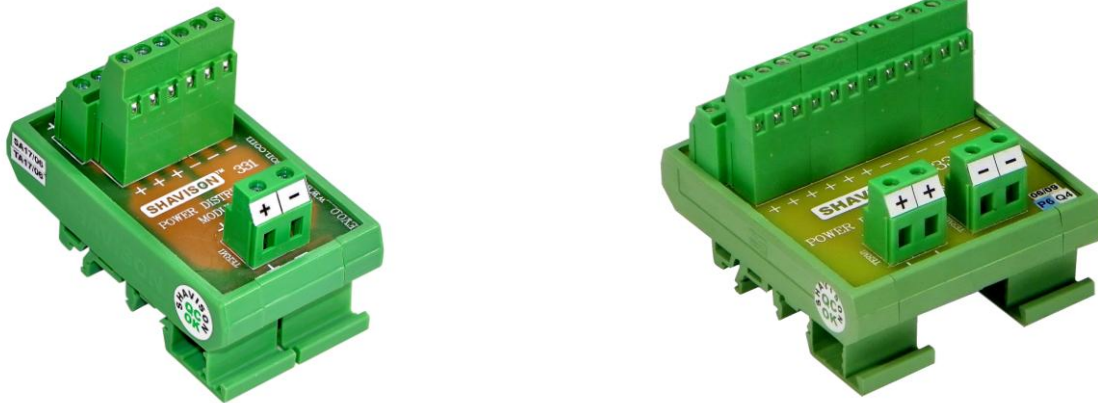


AS331





Dimensions


AS333



Dimensions



Schematic

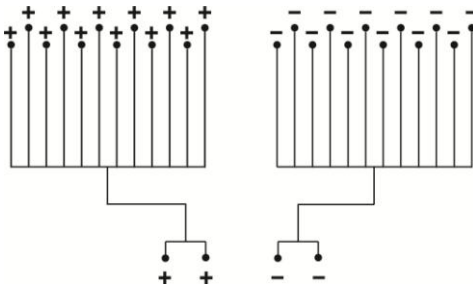

Schematic

VOLTAGE RATING	100VDC / 230V AC			
CURRENT RATING	INPUT	20A max.		
	OUTPUT	5A per channel max.		
OPERATING AMBIENT	0-55°C, 85% RH			
STORAGE AMBIENT	-20°C to 85°C			
TERMINATIONS	INPUT SIDE	Screw type, 2 way terminals for 2.5mm sq. wire		
	OUTPUT SIDE	Screw type, 3 way DD terminals for 2.5mm sq. wire		
MOUNTING	35 mm DIN rail			
ORDERING INFORMATION	ORDER CODE	NO.OF CHANNELS	DIMENSIONS W x H x D (mm)	WEIGHT
	AS331	6	50 x 80 x 65	74 grams
	AS333	12	70 x 80 x 65	130 grams