


## PROXIMITY SENSOR INTERFACE

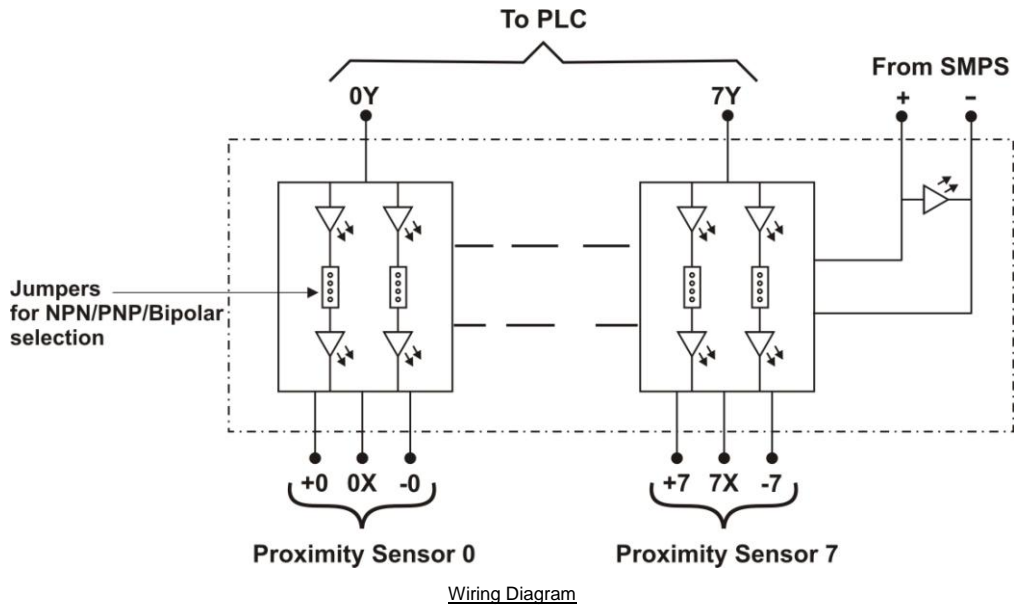

<b>FEATURES</b>	<ul style="list-style-type: none"> <li>Grouping of Terminals for PLC Connections</li> <li>Grouping of Terminals for Sensor Connections</li> <li>Common Power Supply Connections</li> <li>PNP, NPN or Bipolar Indication By Jumpers</li> <li>35mm DIN Rail Mountable</li> </ul>				
<b>OPERATING AMBIENT</b>	0-55°C, 85% RH				
<b>STORAGE AMBIENT</b>	-20°C to 85°C				
<b>TERMINATIONS</b>	Screw type, for 2.5mm sq. wire				
<b>MOUNTING</b>	35 mm DIN rail				
<b>ORDERING INFORMATION</b>	<div style="border: 1px solid black; padding: 5px; display: inline-block;">AS445, -24V</div>				
	NO. OF CHANNELS	DESIGN NO.	INPUT VOLTAGE	DIMENSIONS W x H x D (mm)	WEIGHT (MAX)
	1	AS441	12V : 12VDC, 10-14VDC 24V : 24VDC, 20-28VDC	25 x 80 x 70	70 grams
	2	AS442		45 x 80 x 70	90 grams
	4	AS443		70 x 80 x 70	110 grams
8	AS445	90 x 80 x 70		170 grams	