

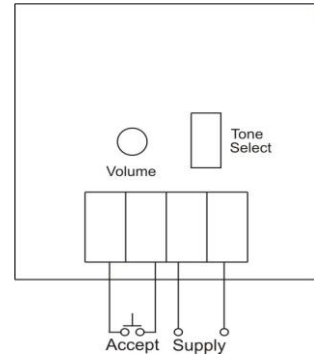


HOOTER – 72x72mm



Terminal Connection



72x72 mm

| ORDER CODE | H72S – 230AC | H72S – 24DC |
|--------------------|--|-------------|
| SUPPLY VOLTAGE | 230V AC ±15% , 50 / 60Hz | 24V DC ±15% |
| INRUSH CURRENT | 3.2A , 20ms | 250mA |
| POWER CONSUMPTION | 6VA / Watt Max. | |
| ACCEPT FACILITY | Terminals on back | |
| RESET TIME | Less than 1 Sec | |
| TONES | 2 Tone | |
| tone select switch | Present on rear | |
| VOLUME CONTROL | Present on rear | |
| AUDIO LEVEL | 110db ±10% | |
| OPERATING AMBIENT | 0~55°C | |
| STORAGE AMBIENT | -20°C to 85°C | |
| HUMIDITY | 95% RH non condensing | |
| MOUNTING | Flush at front (Panel Mounting) | |
| DIMENSIONS | Overall : 72 x 72 x 65 mm Cutout : 68 x 68mm +0.5, -0.0 | |
| TERMINALS | Suitable for 2.5 mm ² wire | |
| WEIGHT | 190gms | |